


建て付け基準値

単位 (mm)	
a	2.0 ± 1.0
b	1.5 ± 1.0
c	0.5 ± 0.5
d	5.0 ± 1.0
e	4.8 ± 1.0
f	5.6 ± 1.0
g	5.6 ± 1.0
h	4.8 ± 1.0
i	5.6 ± 1.0
j	8.0 ± 1.0
k	5.6 ± 1.0
m	4.8 ± 1.0
n	0.5 ± 0.5
o	7.0 ± 1.0
p	6.9 ± 1.0 (スクラムバン)
	7.4 ± 1.0 (スクラムワゴン)
q	3.0 ± 1.0
r	4.4 ± 1.0
s	3.0 ± 1.0
t	2.1 ± 1.0
u	6.5 ± 1.0 (ハイルーフ)
	5.5 ± 1.0 (ロールーフ)
v	6.4 ± 1.0 (ハイルーフ)
	4.0 ± 1.0 (ロールーフ)



建て付け基準値

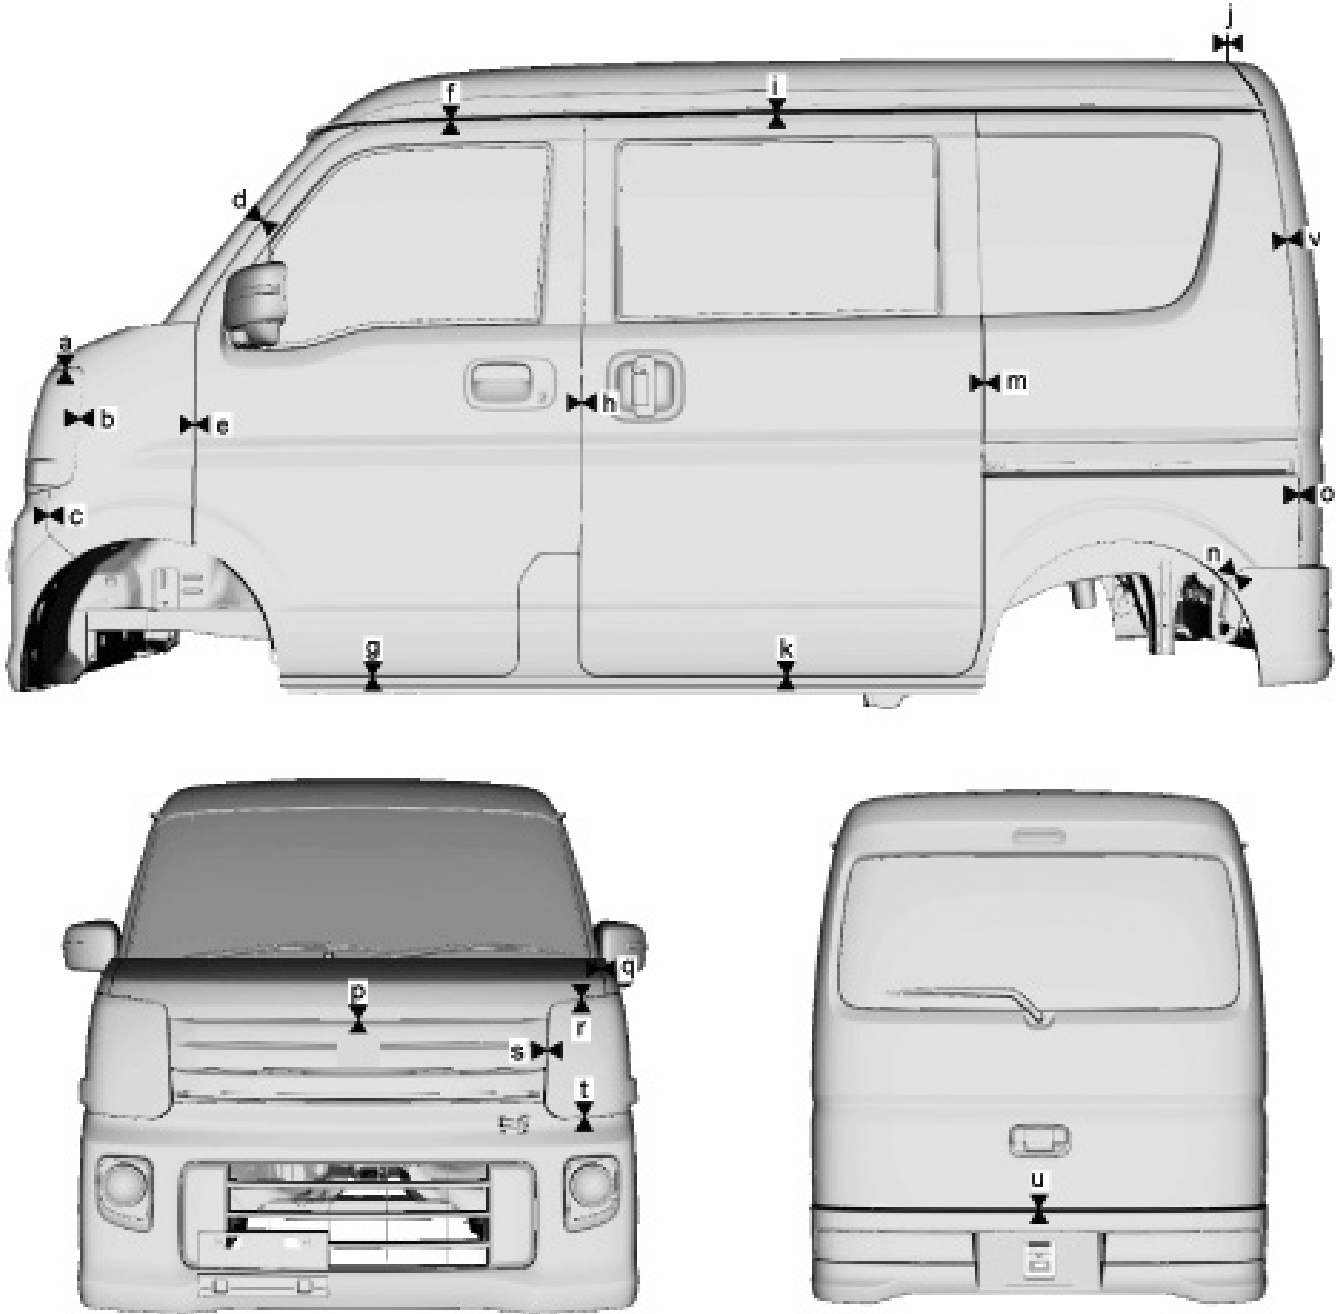

単位 (mm)

a:	2.0 ± 1.0 mm
b:	1.5 ± 1.0 mm
c:	0.5 ± 0.5 mm
d:	5.0 ± 1.0 mm
e:	4.8 ± 1.0 mm
f:	5.6 ± 1.0 mm
g:	5.6 ± 1.0 mm
h:	5.3 +0.5 -1.5 mm
i:	5.6 ± 1.0 mm
j:	8.0 ± 1.0 mm
k:	5.6 ± 1.0 mm
l:	5.3 +0.5 -1.5 mm
m:	0.5 ± 0.5 mm
n:	6.4 +3.1 0.0 mm
o:	6.8 +4.0 0.0 mm (スクラムバン)
	7.4 +3.0 -1.0 mm (スクラムワゴン)
p:	3.0 ± 1.0 mm
q:	4.4 ± 1.0 mm
r:	3.0 ± 2.0 mm
s:	2.1 ± 2.0 mm
t:	6.5 ± 1.0 mm (ハイルーフ)
	5.5 ± 1.0 mm (標準ルーフ)
	6.4 ± 1.0 mm (ハイルーフ)
u:	4.0 ± 1.0 mm (標準ルーフ)