


建て付け基準値

[リヤランプなし]

	～平成29年8月	平成29年9月～
A	7.5 - 1.5mm	7.5 - 1.5mm
B	1.0 - 1.5mm	1.0 - 1.5mm
C	7.5 - 1.5mm	7.5 - 1.5mm
D	1.3 - 1.5mm	1.3 - 1.5mm
E	6.0 - 1.5mm	5.6 - 1.5mm
F	2.5 - 1.5mm	2.8 - 1.5mm
G	6.0 - 1.5mm	6.0 - 1.5mm
H	0.5 - 1.5mm	0.5 - 1.5mm
I	5.5 - 2.0mm	5.5 - 2.5mm
J	5.5 - 1.5mm	5.5 - 1.5mm
K	0 - 1.5mm	0 - 1.5mm
L	5.2 - 2.0mm	5.2 - 2.5mm
M	5.2 - 2.0mm	5.4 - 2.5mm
N	5.4 - 2.0mm	5.4 - 2.0mm
O	5.8 - 2.0mm	5.8 - 2.0mm

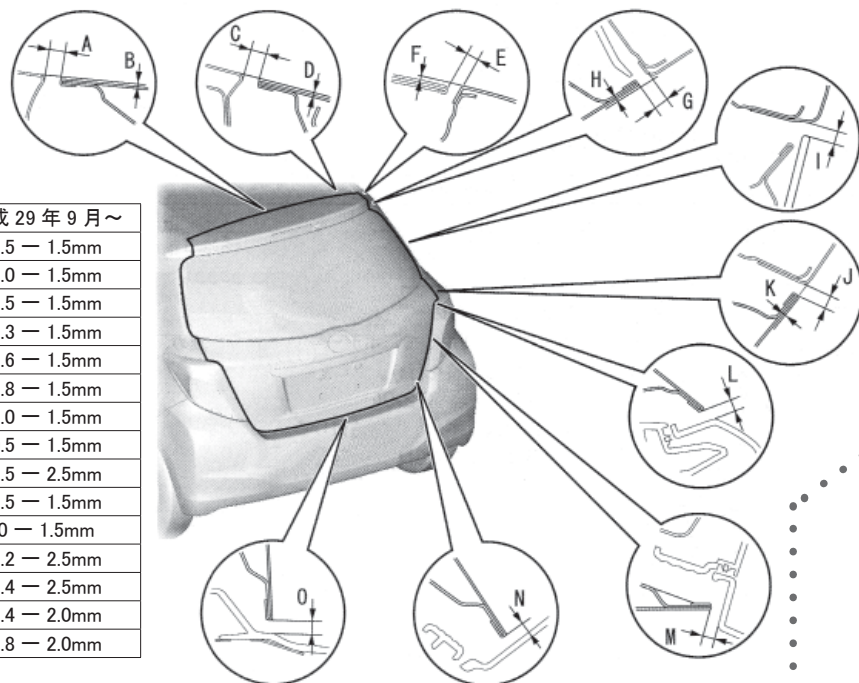

A	4.0 - 2.0mm
B	11.0mm
C	5.0mm
D	3.8 - 1.5mm
E	3.2 - 2.0mm

[リヤランプあり]

A	6.0 - 9.0mm
B	-0.5 - 2.5mm
C	6.0 - 9.0mm
D	-0.5 - 2.5mm
E	6.0 - 9.0mm
F	-0.2 - 2.8mm
G	3.8 - 8.0mm
H	5.0 - 9.0mm
I	4.0 - 9.0mm
J	4.4 - 8.4mm
K	3.8 - 7.8mm
L	3.8 - 7.8mm

